



**ERSKINE**<sup>TM</sup>  
ATTACHMENTS, INC.

SS

## Tree Spade

### FEATURES

- Tree spade comes complete & ready to use, including the all-hydraulic hoses, couplers & controls!
- Good for transplanting the following:
  - hardwood trees to 2-1/2" diameter
  - evergreen trees to 3" diameter
- Three steel cutting blades are 3/8" thick
- Adjustable control valve stand
- All bearings outfitted with grease fittings
- Quick removable blades for easy sharpening
- Short frame design for increased down pressure eliminating the need for rear stabilizers



Unique closed design slide channel keeps out unwanted debris.

### You're Gonna Dig This...

Turn your skid loader into a high-speed, labor-saving transplanting unit. A tree can be dug or transplanted without the operator having to leave the loader. Spade is designed with a very short frame reducing the need for stabilizers and counterweights. Fingertip controls are integrated into the loader handles. The blades of the tree spade overlap to ensure clean root cutting and support of the root ball.



*This Tree Spade has FULL HYDRAULIC CONTROLS for in-cab operation and is fully adjustable to fit most skid steers.*

*Cuts a 30" diameter root ball, 29" deep with fully truncated blades. Blade angles are 25°.*



**800-437-6912**

**[www.erskineattachments.com](http://www.erskineattachments.com)**



SKID STEER




MINI SKID STEER



COMPACT TRACTOR

Tree Spade  
#900806

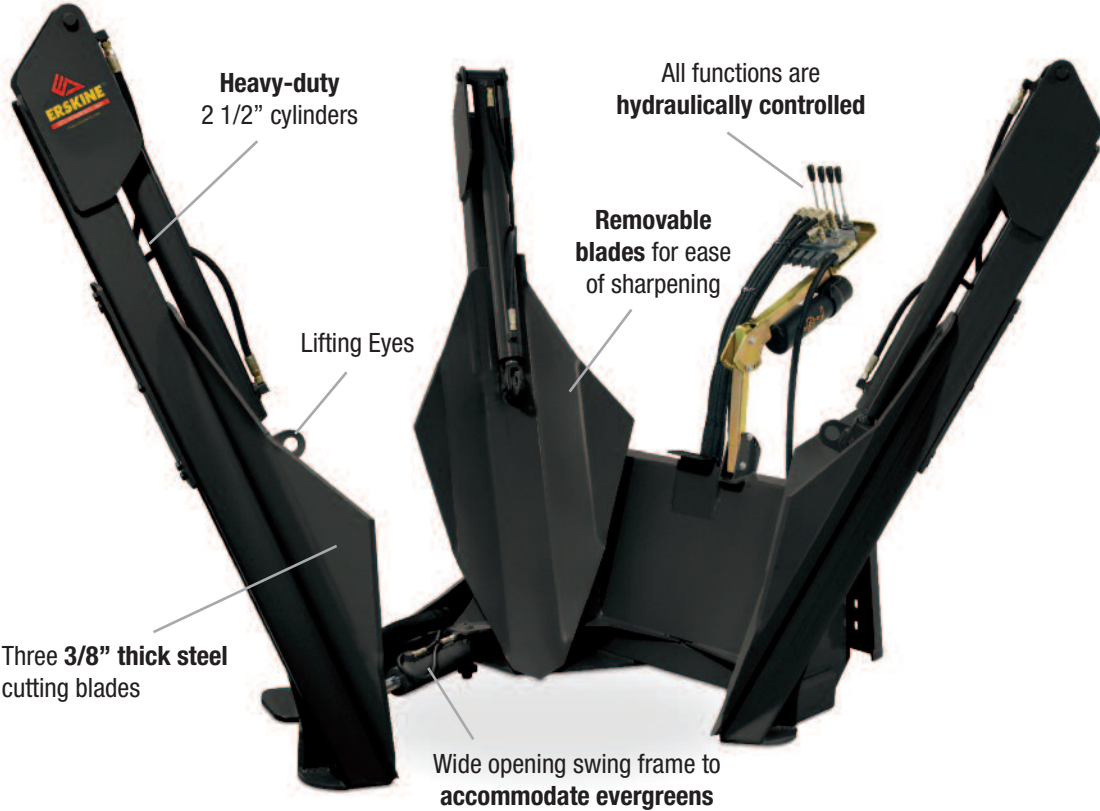

Heavy-duty  
2 1/2" cylinders

All functions are  
hydraulically controlled

Removable  
blades for ease of  
sharpening

Lifting Eyes

Three 3/8" thick steel  
cutting blades

Wide opening swing frame to  
accommodate evergreens



Heavy-duty hydraulic cylinder.



One outside blade swings open.

AVAILABLE OPTIONS

- Factory Installed Faster Flat-Faced Couplers
- Factory Installed Parker Flat-Faced Couplers

STANDARD SPECIFICATIONS

Tree size (evergreen)	3"	Hydraulic PSI	2,500
Tree size (hardwood)	2.5"	Hydraulic Remotes	1
Root Ball Diameter	30"	Skid Steer Attachment	Universal 3-Point
Root Ball Depth	29"	Hitch Adapter	Optional / 7M
Blade Angle	25	Loader Adapter	Optional / 10M
No of Blades	3	Unit Shipping Weight	1,450#
Blade Thickness	3/8" Mild Steel	Unit Weight w/Root Ball	1,950#
Slides	Steel	Bottom Width	48"
Blade Truncation	Semi	Top Width	90"
Outside Towers		Bottom Length	50"
Swing Open	Yes	Top Length	81"
Operator Controls	Hydraulic		
Hydraulic Flow (GPM)	5-25		



**ERSKINE**<sup>TM</sup>  
ATTACHMENTS, INC.

A Legacy of Excellence Since 1948

*"The righteous keep moving forward, and those with clean hands become stronger and stronger." Job 17:9*

Prices and specifications subject to change without notice • F.O.B. the Factory